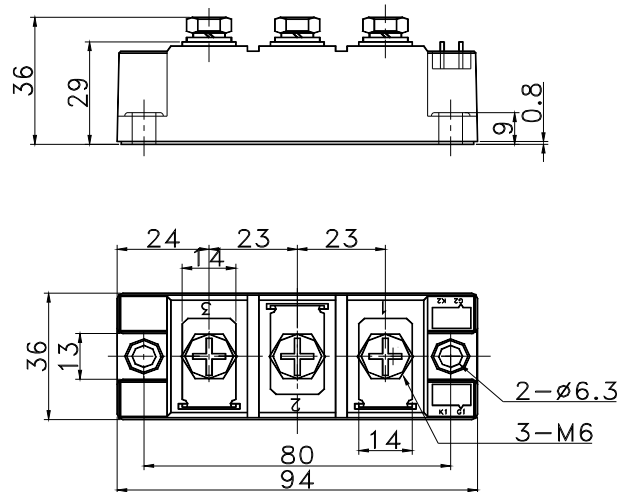
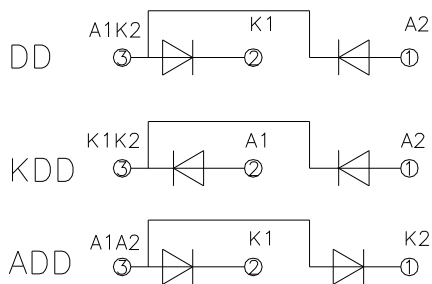


**DD135 ADD135 KDD135**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T <sub>j</sub> (°C)	VALUE			UNIT
				Min	Type	Max	
I <sub>F(AV)</sub>	Mean forward current	180° half sine wave 50Hz Single side cooled, T <sub>C</sub> =100°C	150			135	A
I <sub>F(RMS)</sub>	RMS forward current	Single side cooled, T <sub>C</sub> =100°C	150			212	A
V <sub>RRM</sub>	Repetitive peak reverse voltage	V <sub>RRM</sub> tp=10ms V <sub>RSM</sub> = V <sub>DRM</sub> &V <sub>RRM</sub> +200V	150	600		1800	V
I <sub>RRM</sub>	Repetitive peak current	at V <sub>RRM</sub>	150			12	mA
I <sub>FSM</sub>	Surge forward current	10ms half sine wave	150			3.90	KA
I <sup>2</sup> t	I <sup>2</sup> T for fusing coordination	V <sub>R</sub> =0.6V <sub>RRM</sub>				77.5	A <sup>2</sup> s*10 <sup>3</sup>
V <sub>FO</sub>	Threshold voltage		150			0.80	V
r <sub>F</sub>	Forward slop resistance					1.18	mΩ
V <sub>FM</sub>	Peak forward voltage	I <sub>FM</sub> =405A	25			1.38	V
R <sub>th(j-c)</sub>	Thermal resistance Junction to heatsink	At 180° sine Single side cooled				0.310	°C /W
V <sub>iso</sub>	Isolation voltage	50Hz, R.M.S, t=1 min, I <sub>iso</sub> : 1mA(max)		2500			V
F <sub>m</sub>	Terminal connection torque(M5)					3.0	N·m
	Mounting torque(M6)					3.0	N·m
T <sub>stg</sub>	Stored temperature			-40		125	°C
W <sub>t</sub>	Weight					320	g
Outline	214F3						

**OUTLINE DRAWING & CIRCUIT DIAGRAM**



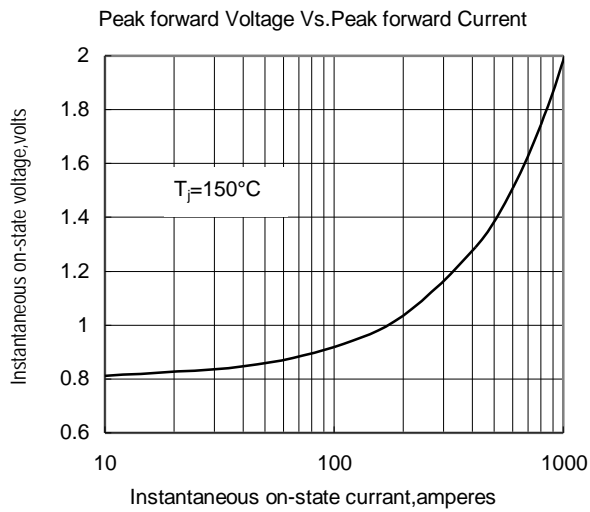


Fig.1

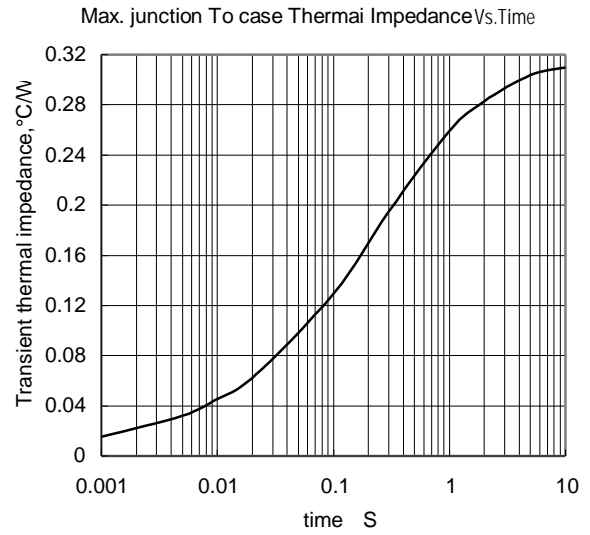


Fig.2

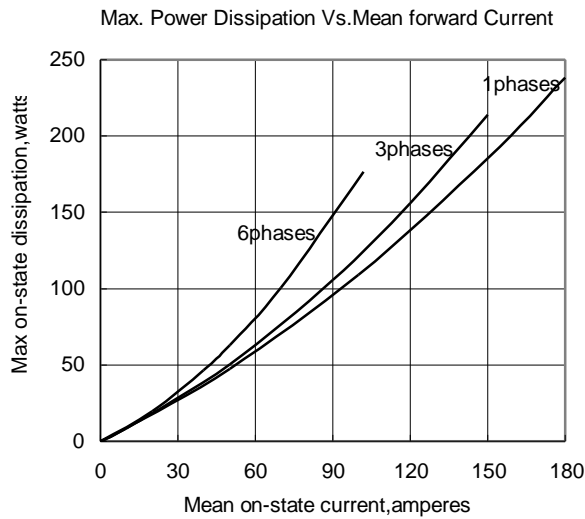


Fig.3

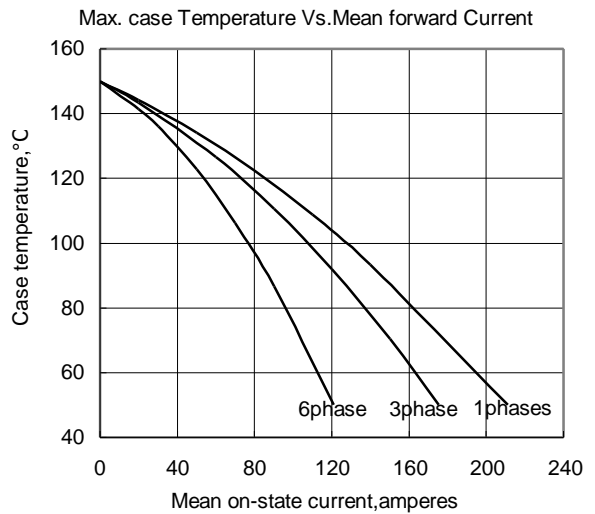


Fig.4

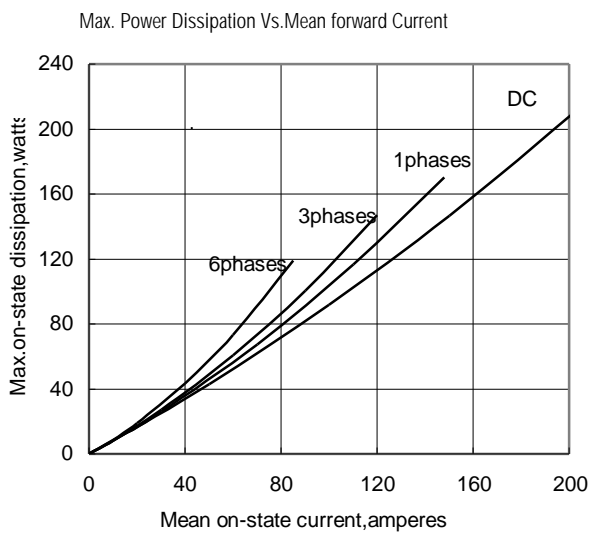


Fig.5

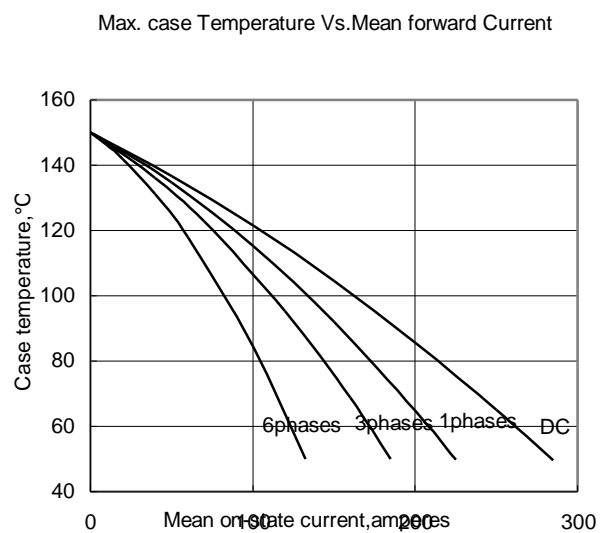


Fig.6